

INSULTECH

Thermal Blanket Insulation

FOR THE
STEAM
PROCESS
INDUSTRY

INSULTECH Blanket Insulation...

...is the insulation solution to problem insulation areas on all types of steam process equipment. The removable, reusable features of INSULTECH drastically lower operation costs, shorten down time, save valuable energy, improve the work environment and reduce labor costs associated with installation, removal and reinstallation.

...is a custom designed, self-contained insulation system.

This means quality construction for specific application needs, quality designs retrofitted to field conditions and design features which make INSULTECH user friendly to the field mechanic.

...utilizes CAD technology for maximum design accuracy. Through years of information gathering, standardized designs as well as custom designs are possible for all types of equipment. Our CAD file base includes standardized designs on Gate Valves, Condensate Pumps, Pressure Reducing Valves, Slip and Bellows Expansion Joints, Ball Joints, Strainers and Steam Traps. Even the most difficult geometric surfaces such as Steam Turbines can be engineered for blanket treatment.

...is self-contained insulation system, constructed of a high density insulation filler with a fully encapsulated outer jacketing. The outer jacketing is double sewn and bound at the closing seams. The jacketing and sewn construction ensure long lasting protection to the insulation filler.

...can withstand extreme conditions such as steam tunnels and manholes. High chloride environments with high humidity and possible flooding have little or no effect on specific blanket designs. INSULTECH offers a wide range of specialty designs to accommodate these extreme conditions.

...comes equipped with all necessary fastening hardware.

The fasteners are an integral part of the blanket design and become the dominant feature in making installs and removals quick and easy. All metal hardware is stainless steel for added strength and durability. Velcro can be sewn into both the belting system as well as to the outer jacketing flap.



HEAT EXCHANGER HEADS

Design: LT450SS - 1.5" thickness
Fastener: Stainless Steel Wiretwists



HEAT EXCHANGER HEAD & BODY

Design: LT450TT - 1.5" thickness
Fastener: Velcro Flaps / Stainless Steel Wiretwists

APPLICATIONS



GATE VALVES & SERVICE CONNECT PIPING

Design: MT800SGM
Fastener: Stainless Steel Wiretwists



HIGH PRESSURE STEAM EXPANSION JOINT & PIPING

Design: LT450STF20
Fastener: Side Release Buckle Straps



HIGH PRESSURE ORIFICE FLANGE

Design: MT800SGM - 2" thickness
Fastener: Stainless Steel Wiretwists

INSULTECH Blanket Insulation...

...includes a 3.5" x 1.5" identification tag for each blanket piece. The tag includes 1/8" embossed lettering for individual piece labeling. The tag is riveted directly or indirectly to the outer jacketing surface. The tag becomes an integral part of the blanket. In the event a blanket is removed, the tag will identify its rightful place at the time of installation. Tags come in both stainless steel and aluminum.

...will accommodate varying temperature extremes (Ambient to 1100°F). With many design specifications established as industry standards, optimum service life can be expected with cost efficiency. Consult a factory representative for further information on specifying.

...is not just a product purchase. Our ultimate goal is problem-solving at many levels. Shannon Enterprises can offer "Energy Surveys" for steam and process systems, "Sound Surveys" for noisy equipment or "Engineering Services" for packaged systems. Our knowledge in the field of insulation is broad and our abilities as a full service blanket insulation manufacturer are unprecedented in the industry.



STEAM CONDENSATE PUMP

Design: LT450TT - 1" thickness
Fastener: Stainless Steel Wiretwists



8" 250# FLANGED GATE VALVE

Design: LT450SS
Fastener: Stainless Steel Wiretwists



CONDENSATE PUMP RETURN PIPING & FITTINGS

Design: LT450SS
Fastener: Stainless Steel Wiretwists



BOILER HEAD HEAT EXCHANGER & PIPING

Design: LT450SS
Fastener: Stainless Steel Wiretwists

Energy Surveys – Shannon Enterprises will offer a calculated bare surface heat loss review of your steam system. With a number of survey formats to choose from, INSULTECH Blanket Insulation is recommended on steam piping systems which lack proper thermal insulation performance. INSULTECH Blanket Insulation will be proposed in areas which typically are left uninsulated such as Valves, Flanges, Fittings, PRV's, Strainers, Expansion Joints, Valve Bonnets, Steam Traps, Condensate Pumps, ect.. These bare surface conditions represent an enormous surface area of heat loss which can be calculated. From the heat loss calculations, operating costs and eventually an overall payback period can be determined. The "Energy Survey" becomes a personalized heat loss summary of your steam system, with detailed descriptions of specific locations. Typical "Energy Surveys" show payback periods well within one year's time. When calculating the economic benefit of the initial investment, gains are as high as 15 times the initial investment. Not many capital projects can match these economies.

Engineering Services – Shannon Enterprises is a market leader in design, product development and application. Product line catalogs are available for both INSULTECH Thermal and INSULTECH Acoustic. We are one of the few blanket manufacturers which bridges the gap between theory and application.

Support – Shannon supplies insulation systems not only to the domestic end user market but also the O.E.M. and international markets as well. With a strong representation network, Shannon will continue to emerge as an industry leader, progressive with the changing world.



STEAM PRESSURE REDUCING STATIONS

Design: LT450SS
Fastener: Stainless Steel Wiretwists

INSULTECH

Thermal Blanket Insulation


FOR THE
STEAM
PROCESS
INDUSTRY

INSULTECH Performance Highlights...


Operating Temp.	Thick.	Surface Temp.	Thick.	Surface Temp.	Thick.	Surface Temp.
250°F (121°C)	1"	100.2°F	1.5"	92.0°F	2"	87.4°F
300°F (149°C)	1"	108.6°F	1.5"	98.2°F	2"	92.3°F
350°F (177°C)	1"	117.2°F	1.5"	104.6°F	2"	97.4°F
400°F (204°C)	1"	126.0°F	1.5"	111.2°F	2"	102.7°F
450°F (232°C)	1"	135.0°F	1.5"	118.0°F	2"	108.0°F
550°F (288°C)	1"	154.0°F	1.5"	132.0°F	2"	120.0°F
650°F (343°C)	1"	175.0°F	1.5"	148.0°F	2"	133.0°F
750°F (399°C)	1"	197.0°F	1.5"	165.0°F	2"	147.0°F
850°F (454°C)	1"	221.0°F	1.5"	184.0°F	2"	163.0°F

- The above reference cold face surface temperatures should be used as guidelines for blanket thickness design.
- The cold face surface temperature of the blanket should approach ambient temperature conditions.
- The economic thickness of the blanket should consider blanket cost to thermal performance.
- Heat loss calculations are based on a 70°F ambient using a flat surface condition.


INSULTECH Design Features...

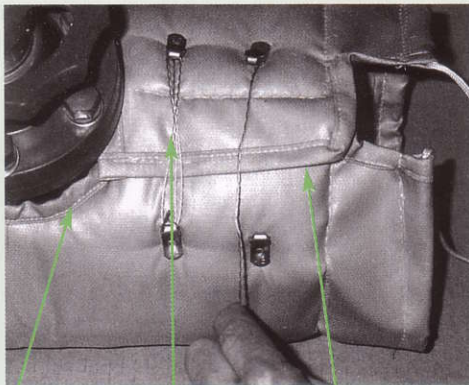

- Double Sewn and Binded Seams
- Stainless Steel Lacing Hardware with Featured Wiretwist Fastener
- Overlapping 1-1/2" Fabric Flap at Closing Seams

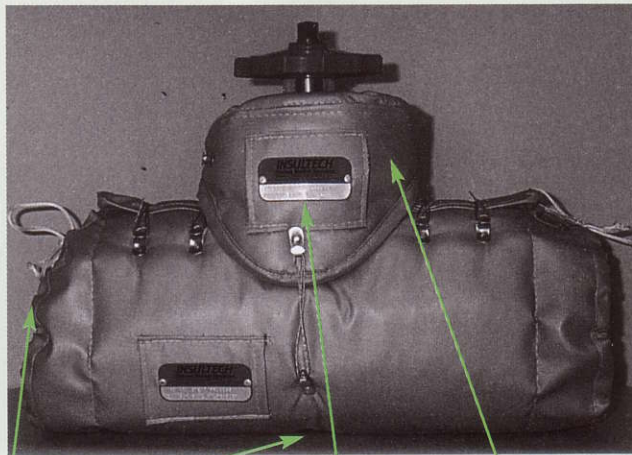

- (Optional) Wind Flap with Draw Chord
- Low Point Stainless Drain Grommet
- Stainless Steel or Aluminum Embossed Identification Tag (Riveted to Outer Jacketing)
- Two-piece Construction (Separate Body and Bonnet)

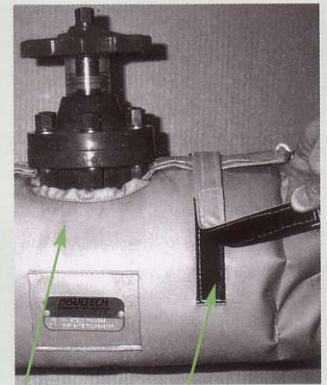

- Durable Silicone Impregnated Fiberglass Cloth
- (Optional) "D" Ring Strap with Velcro® Tab (Double Sewn)

CARL MAGILL ASSOCIATES, INC.
 "Steam Specialties and Piping Products"
 653 Route 52
 Walden, NY 12586
 Tel: (845) 778-5200
 Fax: (845) 778-5274

75 Main Street, P.O. Box 199 • North Tonawanda, NY 14120
 (716) 693-7954 • FAX (716) 693-1647
www.blanket-insulation.com